

MOUNTING ACCESSORIES:

Back flange retention ring

Order No.: 30-B 027

(Contains 10 pcs. per pack)
Special heat resistant silicone ring for retention of the back flange to the spindle. Allows even quicker and easier wheel change of Spin-On wheels.



1. Install the silicone ring onto the recess below the spindle threads.

2. Install the back flange onto the spindle.


Prevents the back flange from falling off the spindle.

Spin-On Performance Kit

Order No.: 30-B 024

Contains 1 universal clamping nut holder. Allows quick and easy storage of all types of clamping nuts when not in-use, hence preventing loss.

Also includes 2 silicone retention rings.

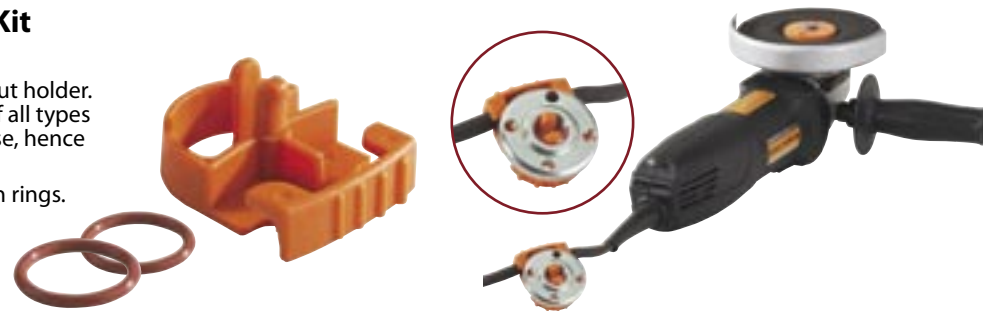

Clamping nut and back flanges for WALTER grinders with 5/8"-11 spindle

Order No.: 30-B 037

Zinc plated 5/8"-11 clamping nut



Order No.: 30-B 036

Standard back flange



Order No.: 30-B 017

Thicker back flange for flush fit and minimal exposure of the spindle (use with Combo wheels, Flexcut and Enduroflex)



SPIN-ON

Exclusive Quick Mounting System



For a free demonstration in your plant,
call toll free: 1-888-592-5837
www.walter.com

Available at:

Simply Spin-On and Go...

Ultra resistant built-in 5/8"-11 threaded arbor

- Quick and easy wheel change for less changeover time
- Perfectly centered every time for best comfort
- Polymer material absorbs vibration
- Minimum need for Pin Key

NEW EXCLUSIVE PACKAGING

Increased wheel protection and safe storage



FX™ CUP



Outstanding for removing paint, coatings, burn marks, rust, scale, gaskets and similar applications.

5/8"-11 SPIN-ON ARBOR

Dia.	Order No.
4-1/2"	07-X 450
5"	07-X 505
7"	07-X 705

ENDURO-FLEX™



The new Enduro-Flex flap discs will remove more welds and finish more surfaces in just one step.

5/8"-11 SPIN-ON ARBOR

ENDURO-FLEX™


Grit	ENDURO-FLEX™			
	40	60	80	120
4-1/2"	06-B 454	06-B 456	06-B 458	06-B 462
5"	06-B 504	06-B 506	06-B 508	06-B 512
6"	06-B 604	06-B 606	06-B 608	06-B 612

ENDURO-FLEX™ STAINLESS


Grit	ENDURO-FLEX™ STAINLESS			
	40	60	80	120
4-1/2"	06-F 454	06-F 456	06-F 458	06-F 462
5"	06-F 504	06-F 506	06-F 508	06-F 512
6"	06-F 604	06-F 606	06-F 608	06-F 612



PATENT PENDING

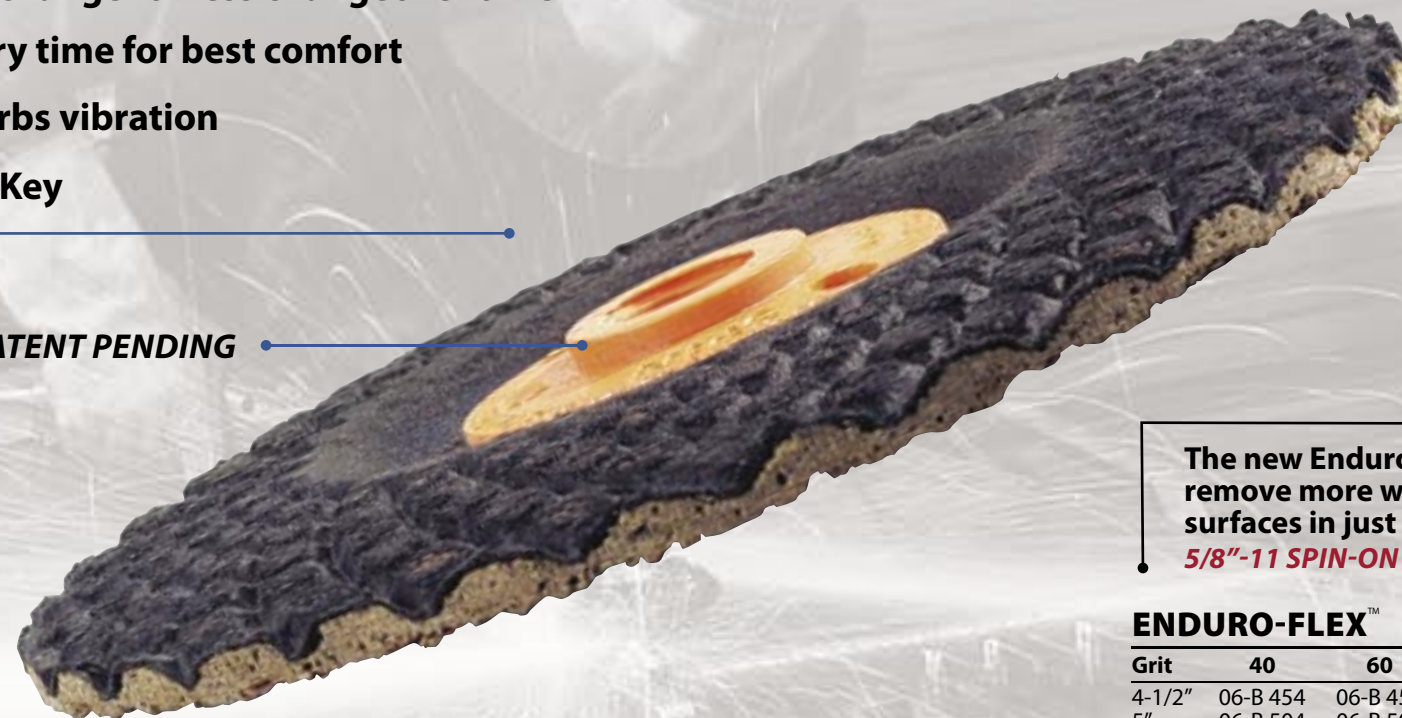

1/4" HP™

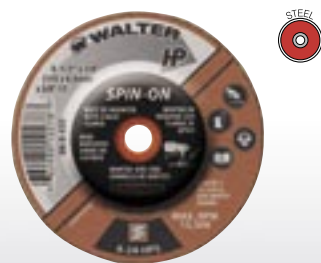

High performance removal on Steel = Long life and fast removal rates.

5/8"-11 SPIN-ON ARBOR

TYPE 27S		TYPE 28S	
Dia.	Order No.	Dia.	Order No.
4-1/2"	08-B 450	4-1/2"	08-B 451
5"	08-B 500	5"	08-B 501

1/4" DOUBLE-X™



Unsurpassed working life AND removes the most steel in the shortest time for best productivity.

5/8"-11 SPIN-ON ARBOR

TYPE 27S	
Dia.	Order No.
4-1/2"	08-K 450
5"	08-K 500

1/4" STAINLESS™



Fast & cool grinding action on all nickel alloyed steels.

5/8"-11 SPIN-ON ARBOR

TYPE 27S		TYPE 28S	
Dia.	Order No.	Dia.	Order No.
4-1/2"	08-F 450	4-1/2"	08-F 451
5"	08-F 500	5"	08-F 501

1/8" HP COMBO™



World's only 1/8" wheel certified safe for grinding and cutting by renowned MPA technical institute.

5/8"-11 SPIN-ON ARBOR

TYPE 27S	
Dia.	Order No.
4-1/2"	08-B 452
5"	08-B 502

1/8" STAINLESS COMBO™



High performance cutting and intermittent light grinding, perfect for notching and grooving.

5/8"-11 SPIN-ON ARBOR

TYPE 27S	
Dia.	Order No.
4-1/2"	08-F 452
5"	08-F 502

FLEXCUT™



Combines the material removal advantage of a grinding wheel, with the flexibility and finish of a sanding disc.

5/8"-11 SPIN-ON ARBOR

Grit	FLEXCUT™		
	36	60	100
4-1/2"	15-L 453	15-L 456	15-L 460
5"	15-L 503	15-L 506	15-L 510